



TYPICAL CURBSIDE CROSS SECTION

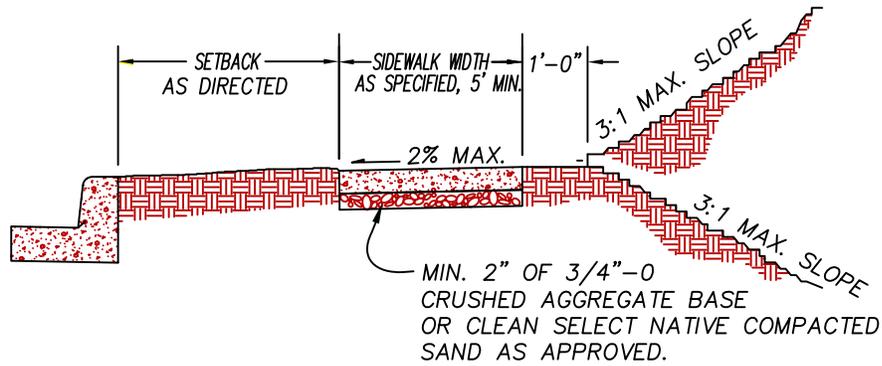

TYPICAL SETBACK CROSS SECTION

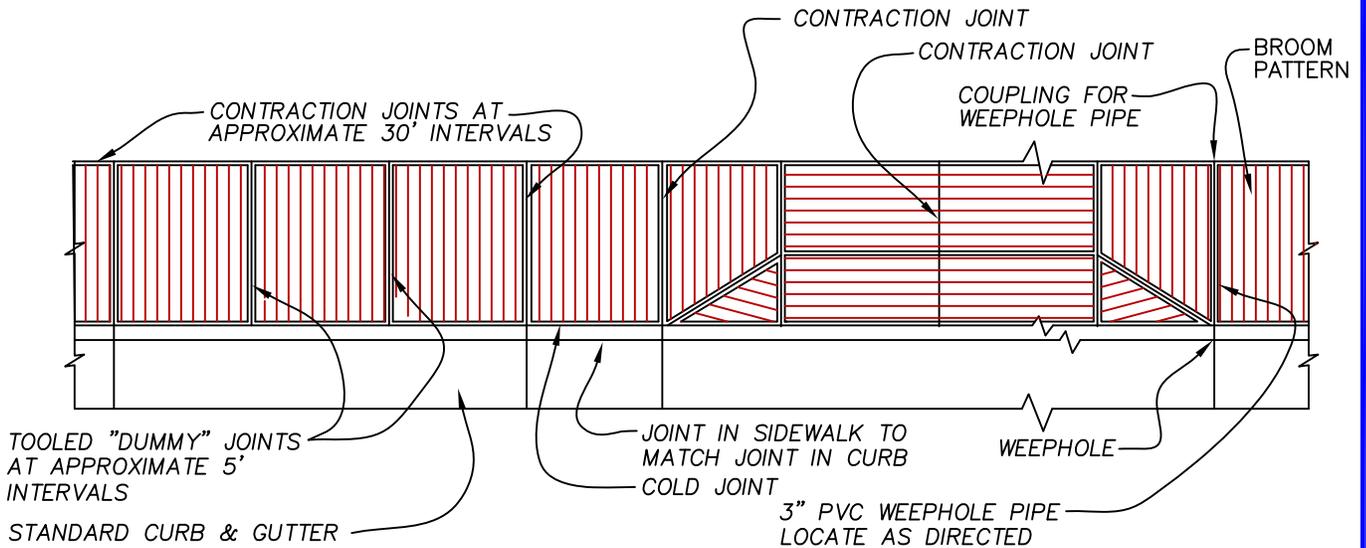

TYPICAL PLAN VIEW

NOTE:

1. SIDEWALKS 8 FEET AND WIDER SHALL HAVE A LONGITUDINAL CONTRACTION JOINT AT THE MIDPOINT.
2. CONCRETE DEPTH FOR STANDARD SIDEWALKS SHALL BE NOMINAL 4" MIN.; THICKNESS IN DRIVEWAY SHALL MATCH EXISTING DRIVEWAY.
3. CONCRETE STRENGTH SHALL BE 3300 PSI MIN.

**CITY OF FLORENCE
STANDARD DRAWING**

SIDEWALK

DATE:
REV-10-25-12

DRAWING NO.
F-205