


METER SIZE	A	B
3/4"	8"	17"
1"	9"	20"

PLAN

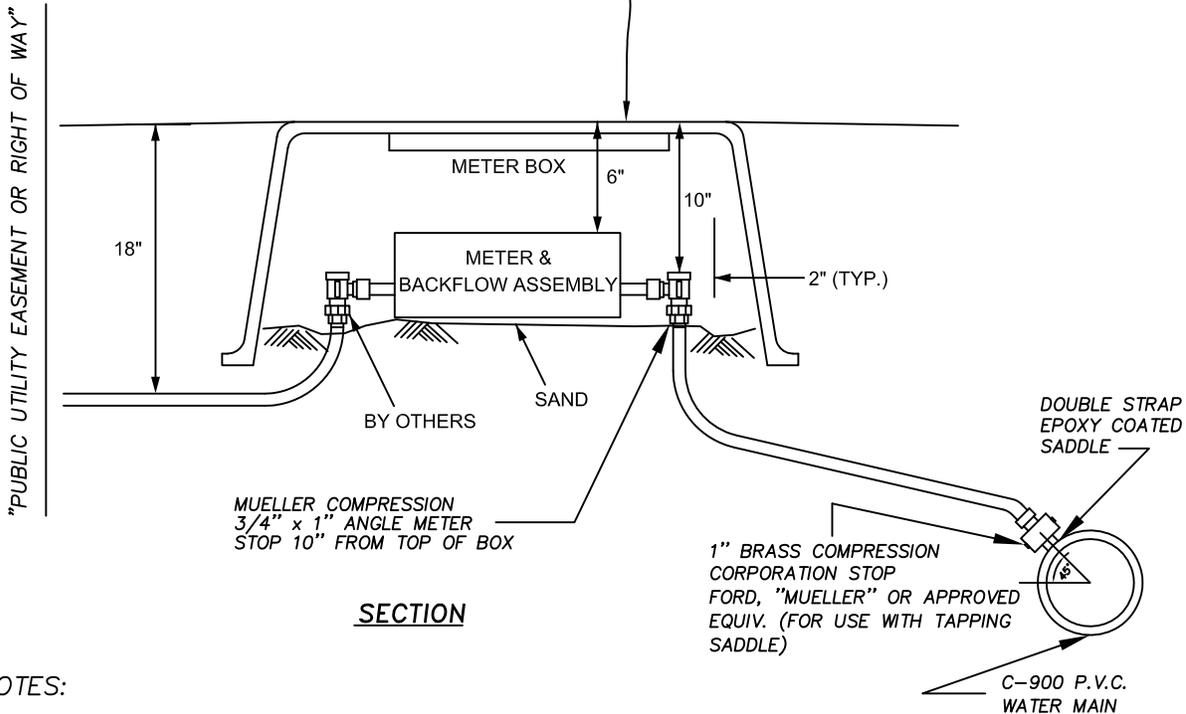

SECTION

NOTES:

1. CONTRACTOR TO INSTALL/METER BOX AND ANGLE METER STOP. METER & BACKFLOW PREVENTION ASSEMBLY WILL BE SET BY CITY UPON REQUEST.
2. METER BOXES SHALL NOT BE INSTALLED WITHIN SIDEWALK OR PAVED AREAS.
3. APPROVED WATER METER BOXES:
 CHRISTY BOX - FL36TBOC18, LID - FL360D
 ARMORCAST: BOX - 17X30X18 FIBERGLASS
 LID - 1730 POLYMER WITH CAST IRON METER READER
4. METER BOX GERNERALLY SET 4" MIN. BEHIND CURB OR SIDEWALK OR BEHIND CURB WHEN SIDEWALK IS PROPERTY TIGHT.
5. CITY STANDARD "MUELLER" BRASS FITTINGS OR EQUIVALENT.

**CITY OF FLORENCE
STANDARD DRAWING**

**TYPICAL WATER SERVICE
WITH METER
AND BACKFLOW
ASSEMBLY**

DATE: 9-23-11	DRAWING NO. F-408-1
------------------	------------------------