


QUICK JOINT FOR POLYETHYLENE PIPE (PEP) INLET BY METER SWIVEL SADDLE NUT OUTLET

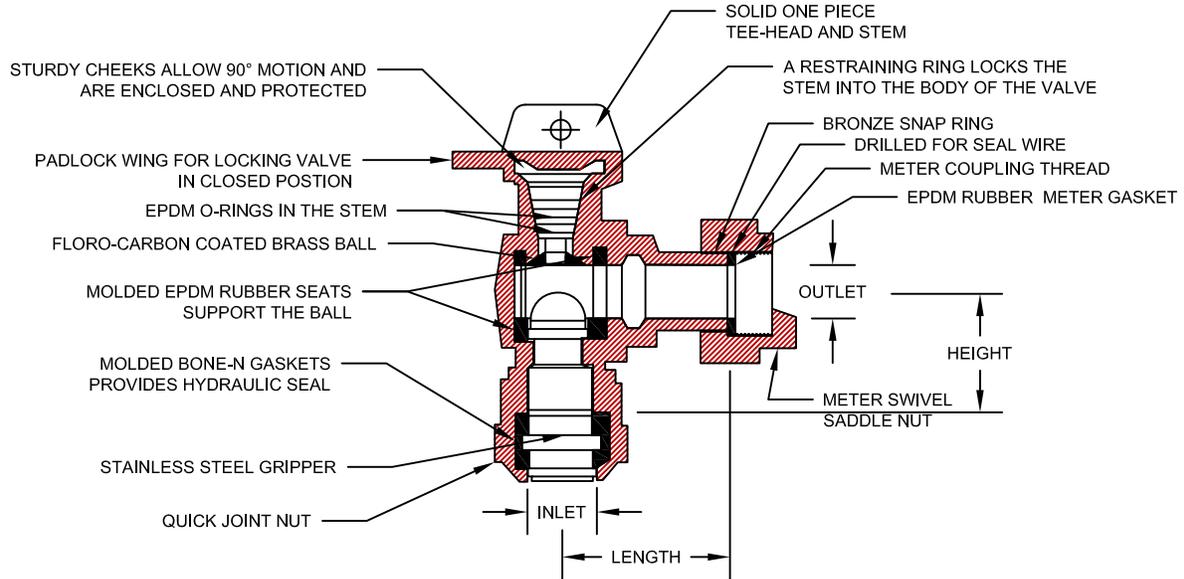

VALVE SIZE	SERVICE LINE SIZE INLET	METER SIZE OUTLET	LENGTH	HEIGHT	APPROX. WT. LBS.	PART NUMBER	SUBSTITUTED ITEM (S)
3/4"	1"	5/8"X3/4" & 3/4"	2-13/32"	2-11/32"	3.0	▼BA63-342W	

▼ UL CLASSIFIED TO ANSI/NSF STANDARD 61.

NOTE: FORD RECOMMENDS USING INSERT STIFFENING WITH PLASTIC PIPE OR TUBING.

FEATURES

- ALL BRASS CONFORMS TO AWWA STANDARD C800 (ASTM B-62 AND ASTM B-584, UNS NO. C83600-85-5-5-5)
- ENDS ARE INTEGRAL OR SECURED WITH ADHESIVE TO PREVENT UNINTENTIONAL DISASSEMBLY.
- HOLE FOR ATTACHING HANDLE IS PROVIDED IN TEE-HEAD.
- 300 PSI WORKING PRESSURE.
- PADLOCK WING FOR LOCKING VALVE IN CLOSED POSITION.
- CONFORMS TO AWWA C700 FOR METER THREADS.

NOTE: RECOMMEND FOR INLET SIDE SHUT-OFF.

OPTIONAL FULL 360° TEE-HEAD ROTATION. INSERT "R" INTO PART NUMBER. EXAMPLE: BA63-324W.

**CITY OF FLORENCE  
STANDARD DRAWING**

**ANGLE  
BALL  
METER  
VALVE**

DATE:

9-27-11

DRAWING NO.

F-408D