


$a/b = 1.25$ MAXIMUM

JOINT SPACING

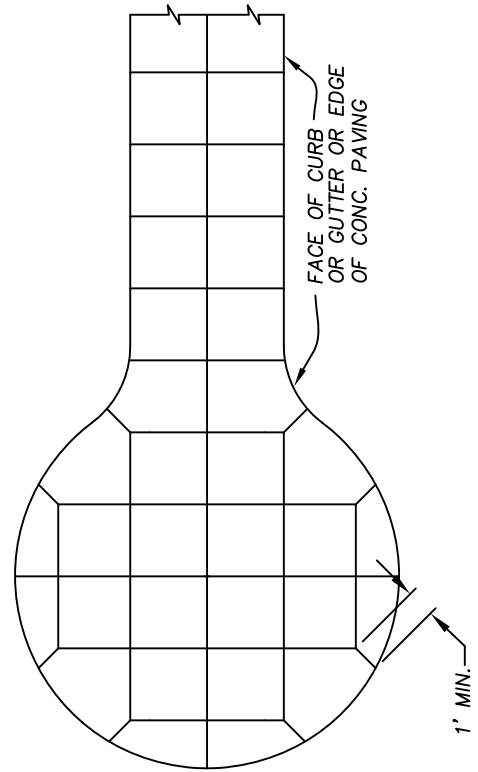

NOTES:

1. ALL TRANSVERSE CONTRACTION JOINTS SHALL MATCH AND ALIGN WITH JOINTS IN CURB AND GUTTER UNLESS PAVING AND CURBS ARE SEPARATED BY AN ISOLATION JOINT. JOINTS IN CUL DE SAC CURB SHOULD BE PLANNED TO MATCH JOINT PATTERN IN PAVING.
2. MAXIMUM JOINT SPACING IN FEET SHALL BE $2\frac{1}{2}$ TIMES THE PAVEMENT THICKNESS IN INCHES.
3. SPECIAL TREATMENT WILL BE REQUIRED FOR JOINTING ADJACENT TO MANHOLES, VAULTS, OR OTHER STRUCTURES INTRUDING INTO PAVING SURFACE.

CITY OF FLORENCE STANDARD DRAWING	
CONTRACTION JOINT DETAIL FOR CONCRETE PAVING	
DATE: MARCH 2007	DRAWING NO. F-212