

STATE OF OREGON
DEPARTMENT OF GEOLOGY AND MINERAL INDUSTRIES
www.OregonGeology.org
W. Lawrence Garrison, Governor Board Chair
Vicki S. McConnell, Director and State Geologist
Andrew V. Poulos, Assistant Director, Geologic Survey and Services
Rachel L. Smith, Project Operations Manager
Ian P. Madin, Chief Scientist

Local Source (Cascadia Subduction Zone) Tsunami Inundation Map Florence, Oregon

Exhibit C

Tsunami Inundation Map Lane-04

Tsunami Inundation Maps for Florence,
Lane County, Oregon
Plate 1

2013

Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other stakeholders assess the potential for disastrous tsunami-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami.

The CSZ is the tectonic plate boundary between the North American Plate and the Juan de Fuca Plate (Figure 1). These plates are converging at a rate of about 1.5 inches per year but the movement is not smooth and continuous. Rather, the plates lock in place and accumulated energy builds up over time. At intervals, this accumulated energy is violently released in the form of a megathrust earthquake rupture where the North American Plate suddenly slips westward over the Juan de Fuca Plate. This rupture causes a vertical displacement of water that creates a tsunami (Figure 2). Similar rupture processes and tsunamis have occurred elsewhere on the planet where subduction zones exist, for example offshore Chile in 1960 and 2010, offshore Alaska in 1964 near Sumatra in 2004, and offshore Japan in March 2011.

CSZ Frequency Comprehensive research of the offshore geologic record indicates that at least 19 major ruptures of the full length of the CSZ have occurred off the Oregon coast over the past 10,000 years (Figure 3). All 19 of these full-length CSZ events were likely magnitude 8.9 to 9.2 earthquakes (Witter and others, 2011). The most recent CSZ event happened approximately 300 years ago on January 26, 1700. Sand deposits carried onshore and left by the 1700 event have been found in estuaries 6 miles inland. As shown in Figure 3, the range in time between these 19 events varies from 110 to 1,150 years, with a median time interval of 490 years. In 2009 the United States Geological Survey (USGS) released the results of a study announcing that the probability of a magnitude 8.9 CSZ earthquake occurring over the next 30 years is 10%, and that such earthquakes occur about every 500 years (WGCEP, 2008).

CSZ Aftershock Locations The sizes of the earthquake and its resultant tsunami are primarily driven by the amount and geometry of the slip that takes place when the North American Plate snaps westward over the Juan de Fuca Plate during a CSZ event. DOGAMI has modeled a wide range of earthquake and tsunami sizes that take into account different fault geometries that could amplify the amount of seawater displacement and increase tsunami inundation. Seismic geophysical profiles show that there may be a steep slip fault running nearly parallel to the CSZ but closer to the Oregon coastline (Figure 1). The effect of this slip fault moving during a full-rupture CSZ event would be an increase in the amount of vertical displacement of the Pacific Ocean, resulting in an increase of the tsunami inundation offshore in

Oregon. DOGAMI has also incorporated physical evidence that suggests that portions of the coast may drop 4 to 10 feet during the earthquake. This effect, known as subsidence, is based on information on fault geometries, subsidence color models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Papers 41 (Priedt and others, 2009) and 43 (Witter and others, 2011).

Map Explanation

This tsunami inundation map displays the output of computer models representing five selected tsunami scenarios, all of which include the earthquake produced subsidence and the tsunami amplifying effects of the slip fault. Each scenario assumes that a tsunami occurs at least Higher High Water (MHHW) tide; MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Nequaqua Bay (Control Coast) tide gauge. To make it easier to understand this scientific material and to enhance the educational aspects of hazard mitigation and response, the five scenarios are labeled as "T-shirt sizes" ranging from Small, Medium, Large, Extra Large, to Extra Extra Large (S, M, L, XL, XXL). The map legend depicts the respective amounts of slip, the frequency of occurrence, and the earthquake magnitudes for these five scenarios. Figure 4 shows the cumulative number of buildings inundated within the map area.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which represents the amount of error in the model when determining the maximum inundation for each scenario. Only the XXL Wet/Dry Zone is shown on this map.

This map also shows the regulatory tsunami inundation line (Oregon Revised Statutes 455.446 and 455.447), commonly known as the Senate Bill 379 line. Senate Bill 379 (1995) instructed DOGAMI to establish the area of expected tsunami inundation based on scientific evidence and tsunami modeling in order to prohibit the construction of new essential and special occupancy structures in this tsunami inundation zone (Priedt, 1995).

Tide, Storm Surge, and Other Coastal Hazards In addition to the tsunami scenarios, the computer model produces time-series data for "gauge" locations in the area. These points are simulated gauge stations that record the time, in seconds, of the tsunami wave arrival and the wave height observed. It is especially noteworthy that the greatest wave height and velocity observed are not necessarily associated with the first tsunami wave to arrive onshore. Therefore, evacuees should not assume that the tsunami event is over until the proper authorities have issued the all-clear signal at the end of the evacuation. Figure 5 depicts the tsunami waves as they arrive at a simulated gauge station. Figure 6 depicts the overall wave height and inundation extent for all five scenarios at the profile locations shown on the map.

Cascadia Subduction Zone Setting

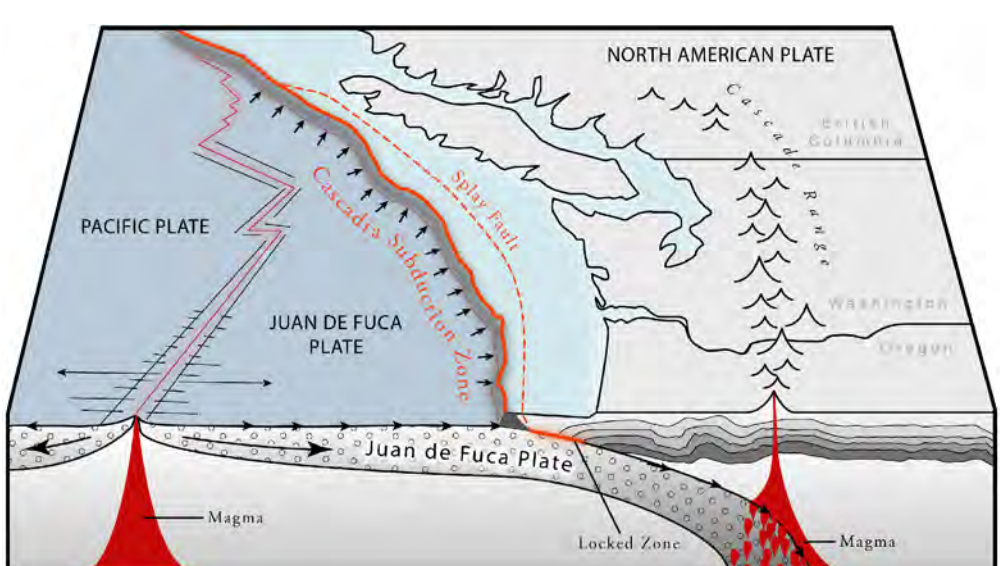


Figure 1. This block diagram depicts the tectonic setting of the region. See Figure 2 for the sequence of events that occur during Cascadia Subduction Zone megathrust earthquake and tsunami.

How Tsunamis Occur

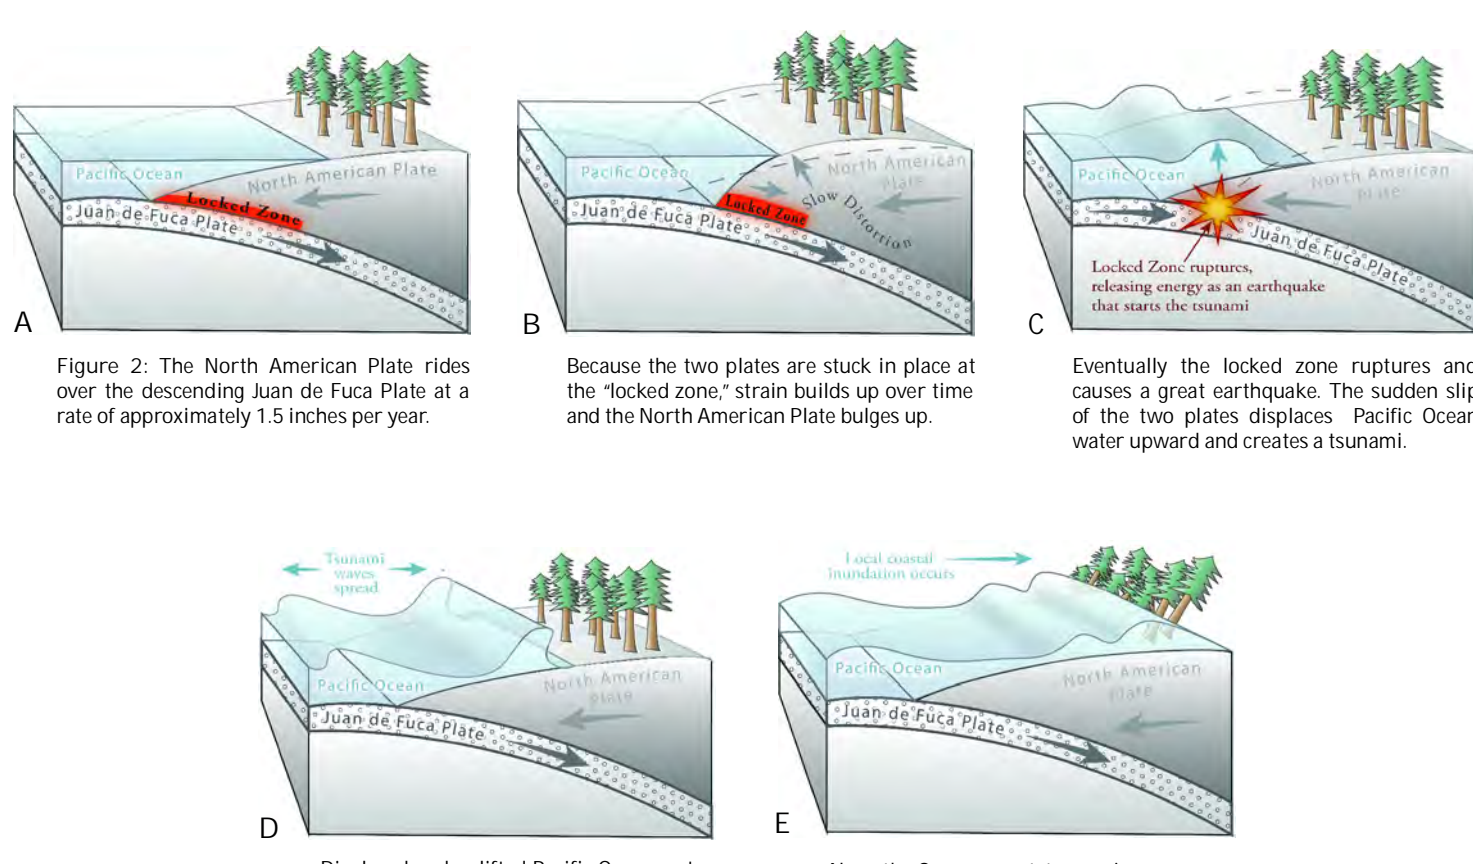


Figure 2. The North American Plate slides over the descending Juan de Fuca Plate at a rate of approximately 1.5 inches per year.

Occurrence and Relative Size of Cascadia Subduction Zone Megathrust Earthquakes

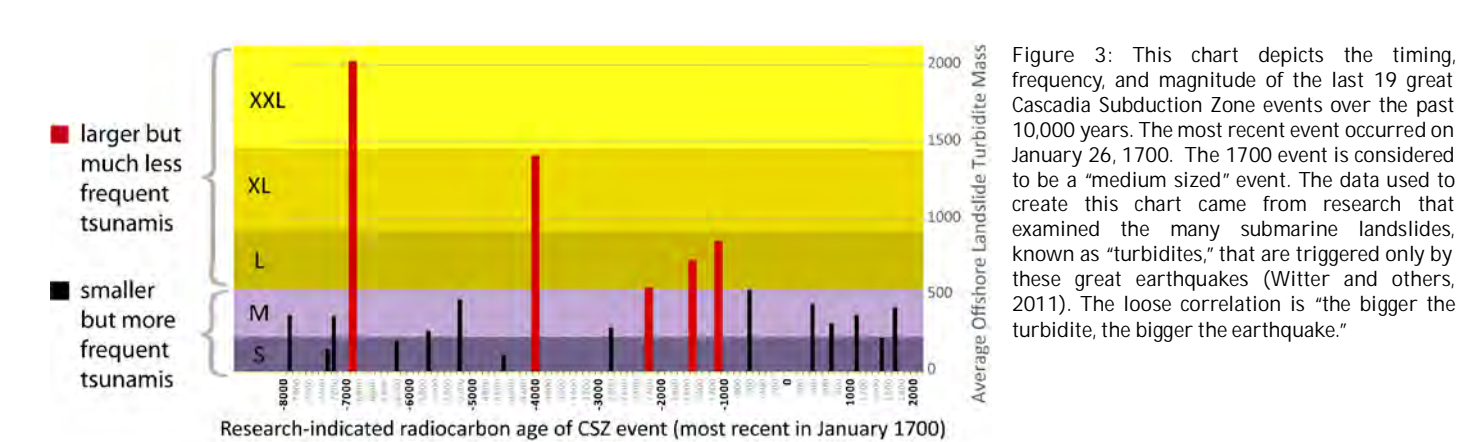


Figure 3. This chart depicts the timing, frequency, and magnitude of the last 19 great Cascadia Subduction Zone events over the past 10,000 years. The most recent event occurred on January 26, 1700. The 1700 event is considered to be a "medium size" event. The data used to create this chart came from research that examined the many submarine landslides, known as "turbidites," that are triggered only by these great earthquakes (Witter and others, 2011). The loose correlation is: the bigger the turbidite, the bigger the earthquake.

Buildings within Tsunami Inundation Zones

	Entire Map Area	Florence	Unincorporated Areas
Total Buildings	7,562	6,541	1,121
Buildings within Tsunami Zones*			
Small	62	53	9
Medium	150	131	19
Large	334	287	47
Extra Large	764	700	64
Extra Extra Large	950	889	70
Percent of Buildings within Tsunami Zones			
Small	0.8%	0.8%	0.8%
Medium	2.0%	2.0%	1.7%
Large	4.4%	4.4%	4.2%
Extra Large	10.2%	10.7%	5.7%
Extra Extra Large	12.5%	13.6%	6.2%

*Building counts shown are based on polygon centroids and are cumulative within the map area.

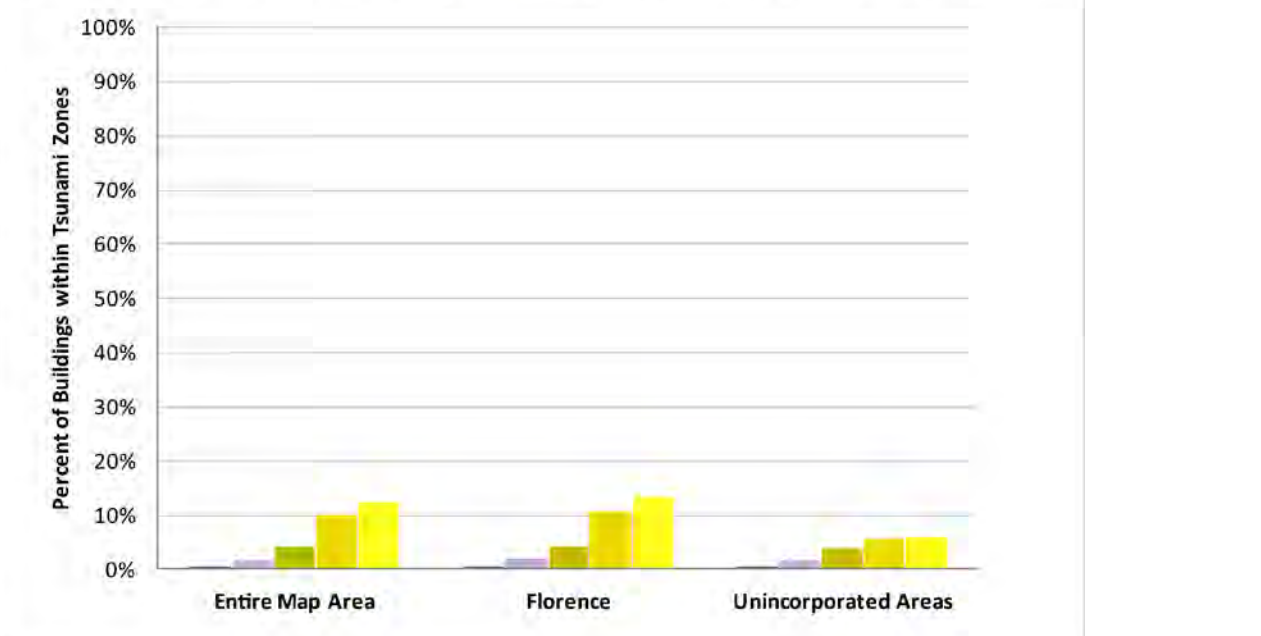


Figure 4. The table and chart show the number of buildings inundated for each "T-shirt size" scenario for cities and unincorporated portions of the map.

Estimated Tsunami Wave Height through Time for Simulated Gauge Station

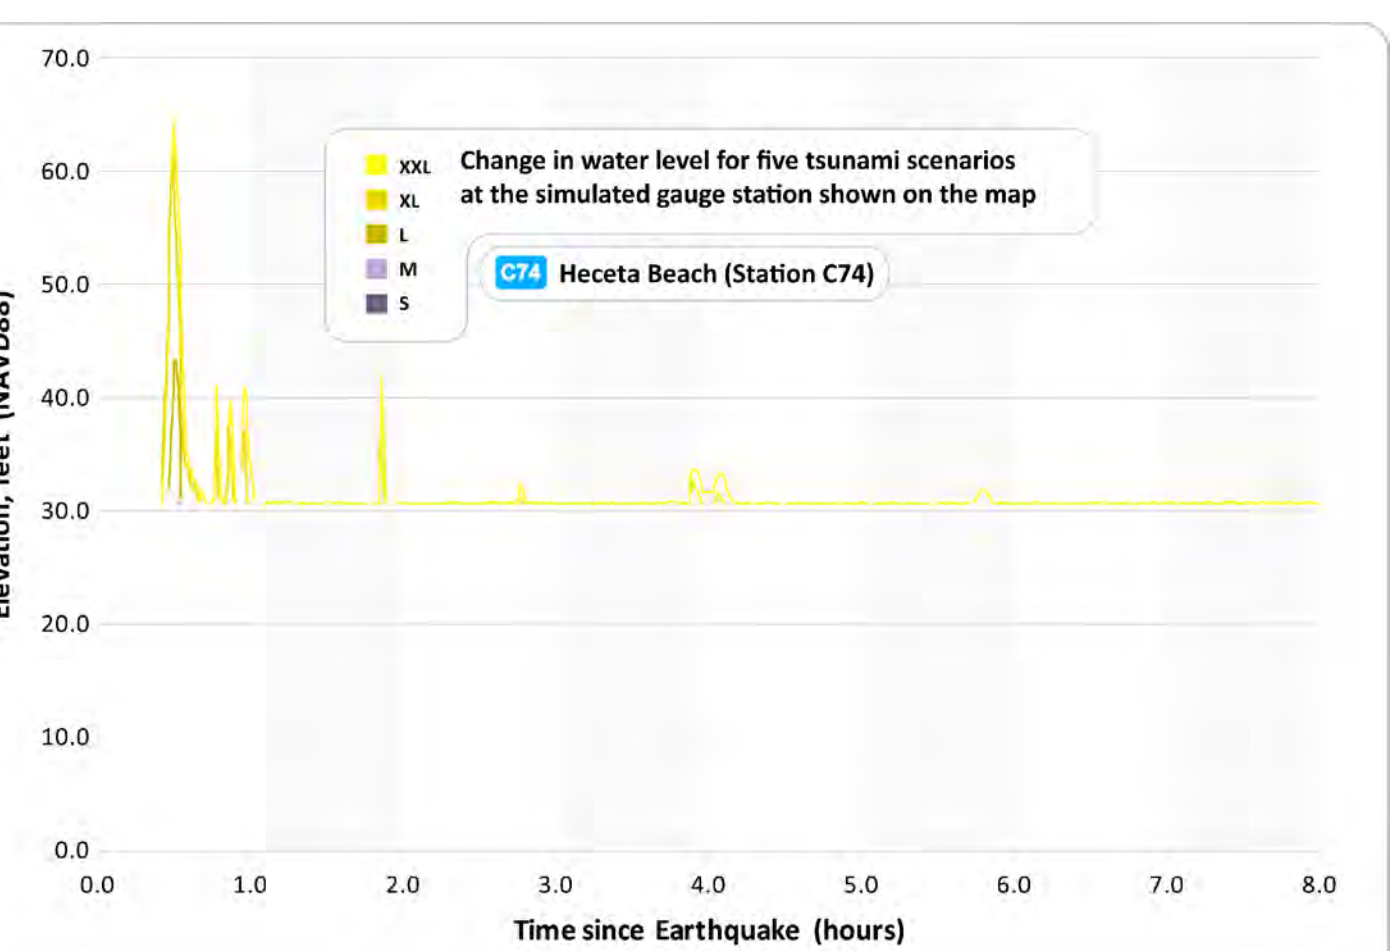


Figure 5. This chart depicts the tsunami waves as they rise at the selected reference point (simulated gauge station). It shows the change in wave heights for all five tsunami scenarios over an 8-hour period. The starting water elevation (0 ft) used takes into account the local land subsidence or uplift caused by the earthquake. Wave heights vary through time, and the first wave is not necessarily the largest as waves interact and reflect off local topography and bathymetry. Any absence of data indicates periods for which tsunami inundation from next tide occurred or has subsided from the current location area and any area is exposed.

Maximum Wave Elevation Profiles


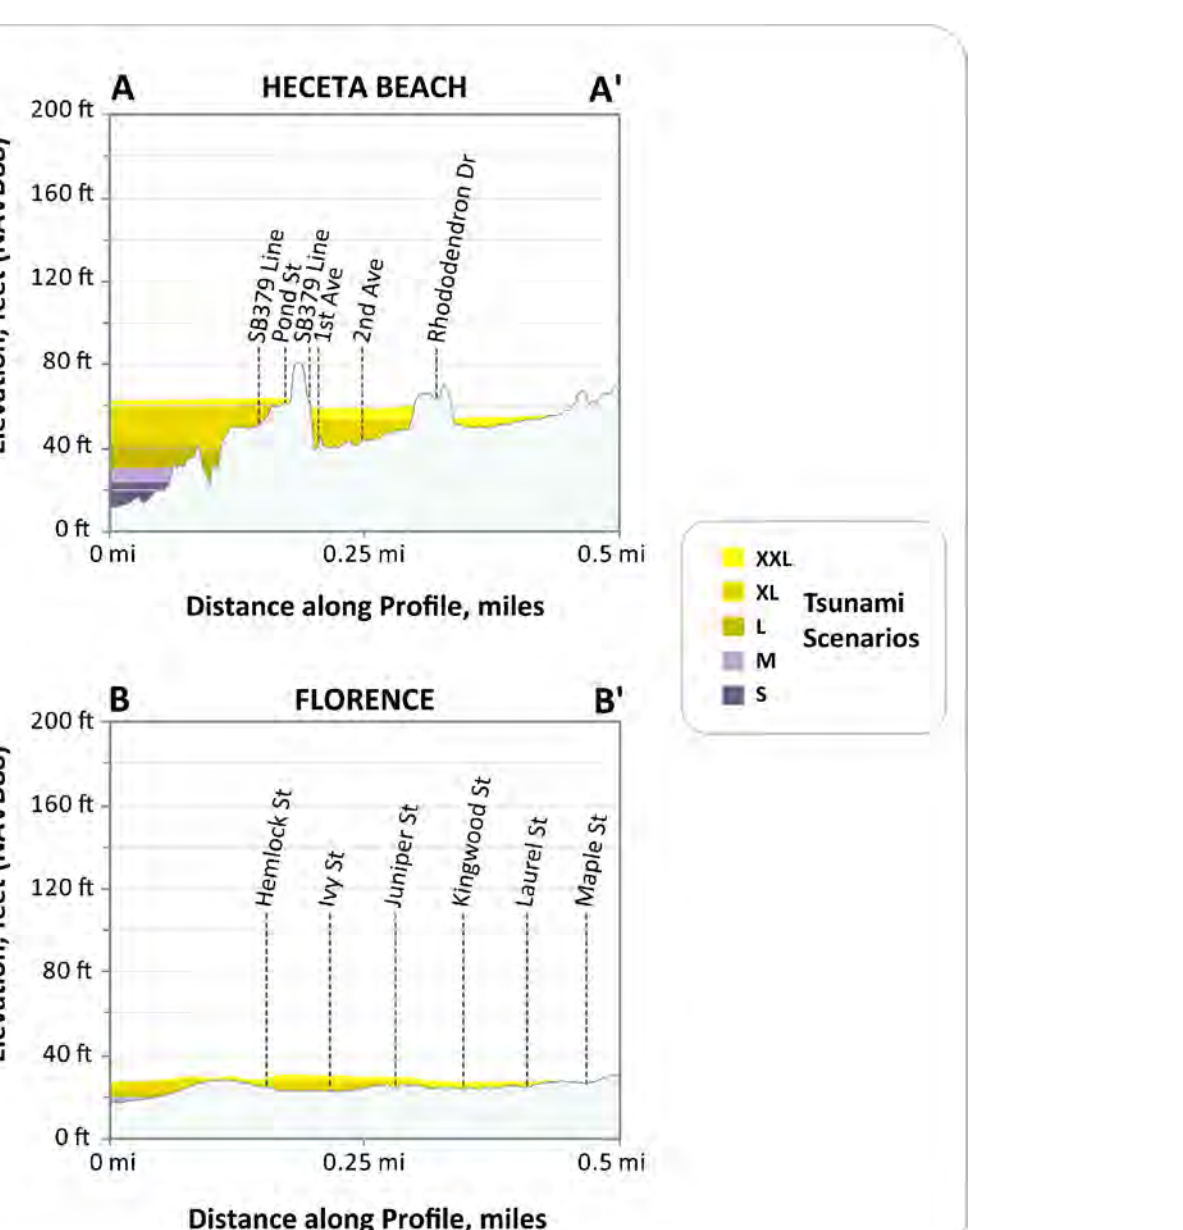



Figure 6. These profiles depict the expected maximum tsunami wave elevation for the five "T-shirt" scenarios along lines A-A' and B-B'. The tsunami inundation zone is indicated by high tide and is shown for local subsidence or uplift of the ground surface.

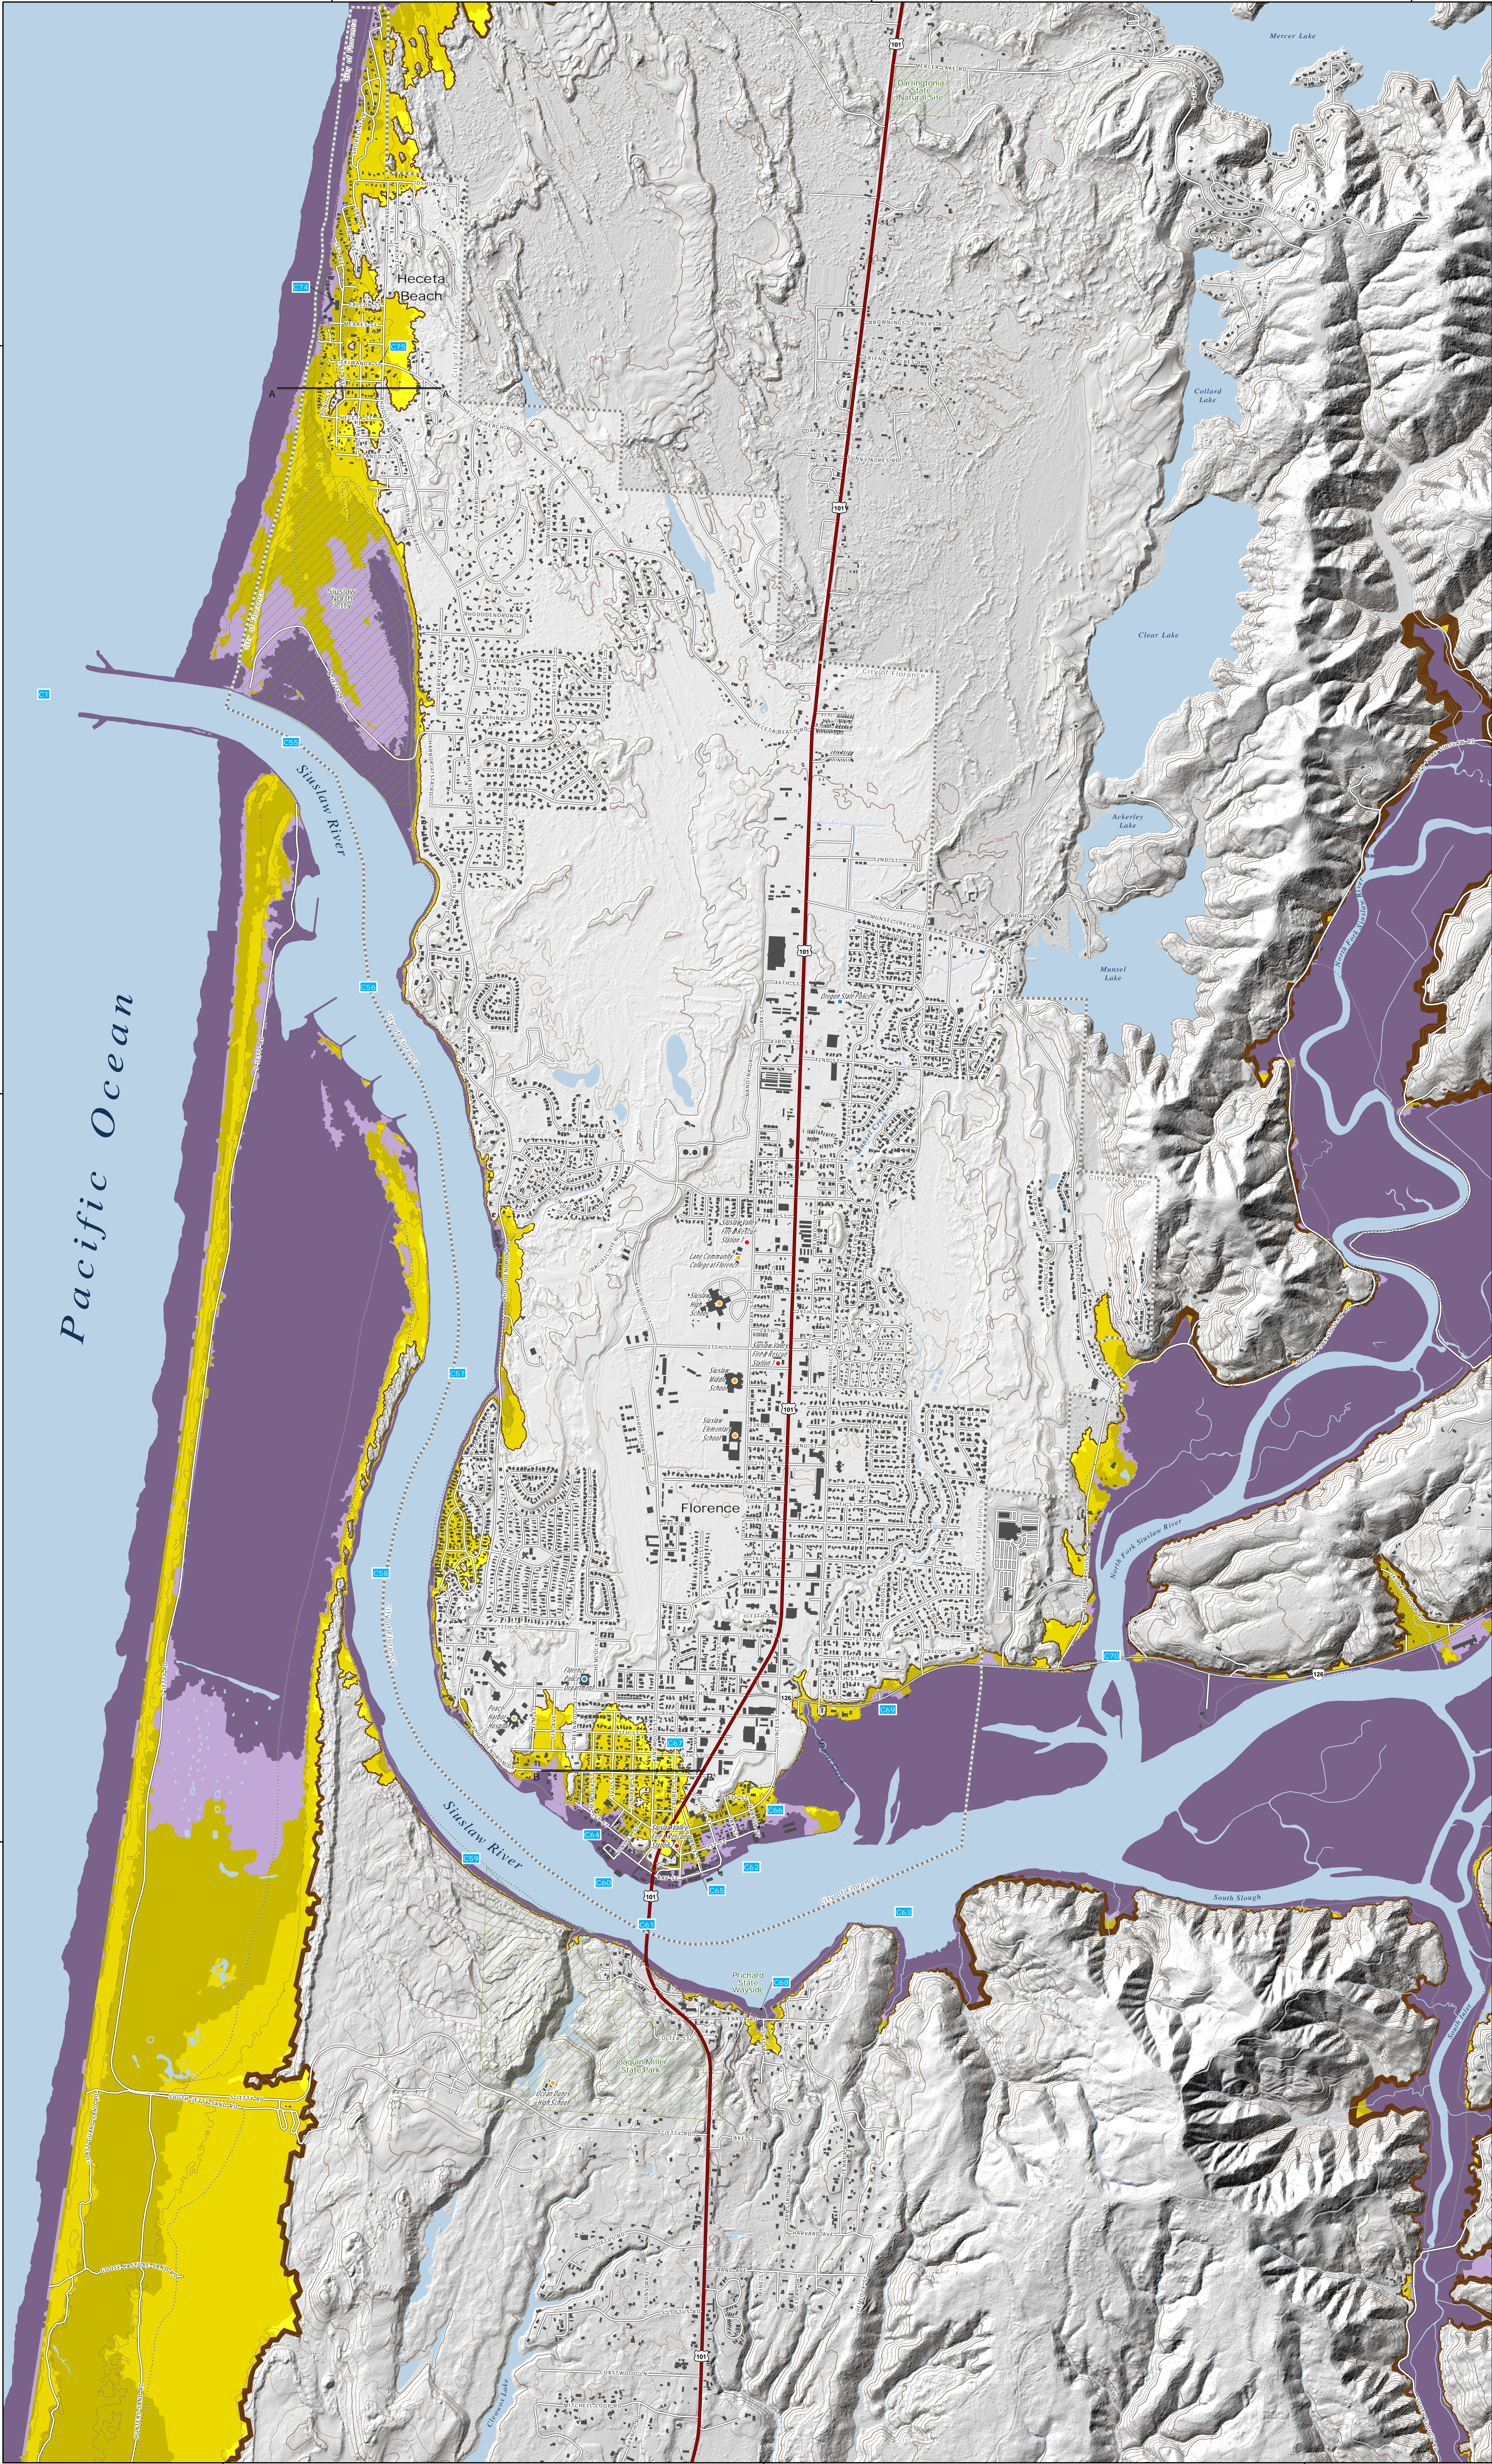

Legend

Earthquake Size	Average Slip (Range) (ft)	Maximum Slip (Range) (ft)	Time to Accumulate Slip (yrs)	Earthquake Magnitude
XXL	59 to 72	118 to 144	1,200	-9.1
XL	56 to 72	115 to 144	1,050 to 1,200	-9.1
L	36 to 49	72 to 98	650 to 800	-9.0
M	23 to 30	46 to 62	425 to 525	-8.9
S	13 to 16	30 to 36	300	-8.7

Tsunami Inundation Map Index

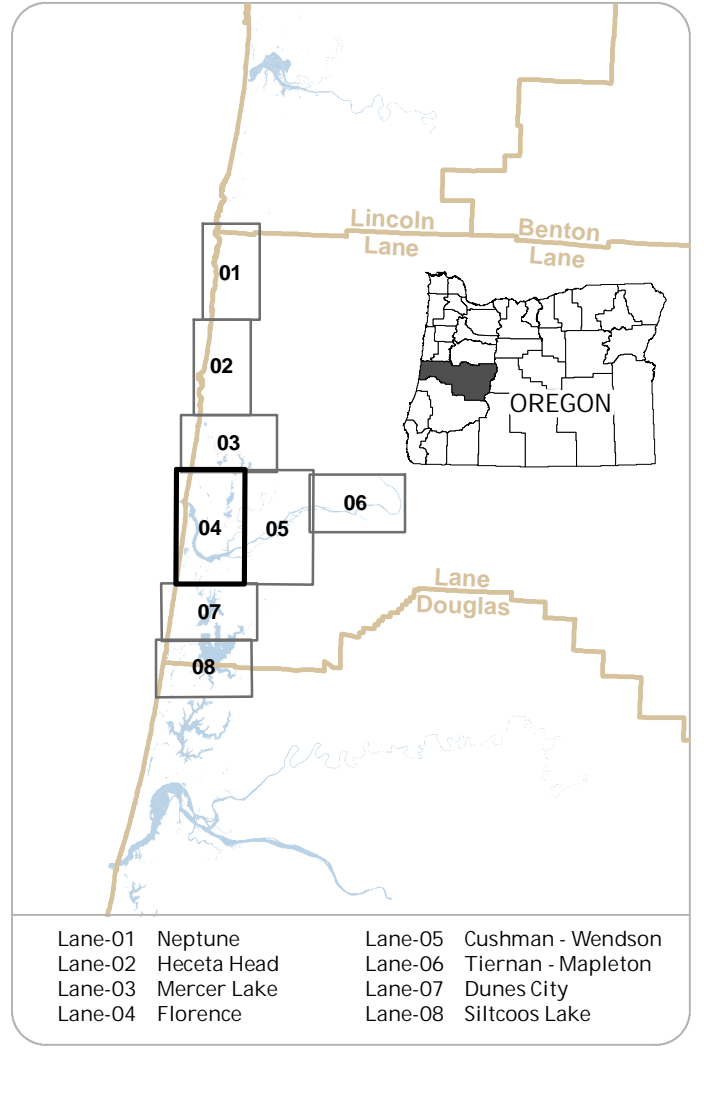

Data References

Source Data: This map is based on hydrodynamic tsunami modeling by Joseph Zhang (Oregon Health and Science University, Portland, Oregon). Model data input was provided by John T. English and George P. Priedt, Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon. Hydrology data, contours of critical facilities, and building footprints were created by DOGAMI. Survey BIL 3 TV data were redigitized by Rachel L. Smith and Ian P. Madin (DOGAMI), in 2011. USGS data were provided by the United States Geological Survey (USGS). Urban growth boundaries (2011) were provided by the Oregon Department of Land Conservation and Development (OLCD). Transportation data (2011) provided by Lane County were created by DOGAMI to improve the spatial accuracy of the features or to add newly constructed roads not present in the original data layer. Lidar data from DOGAMI Lane County quadrangle (LCO-2009-41324, H11 Florence; LCO-2009-41324 H21 Coquille; LCO-2011-44124 A11 Mercer Lake; and LCO-2011-44124 A21 Merritt Lake) were used. All other features shown on geographic coordinates.

References

2007 Working Group on California Earthquake Probabilities (WGCEP). 2007. Uniform California Earthquake Risk Forecast: Scenario 2 (USCERF 2). U.S. Geological Survey Open-File Report 2007-1437 and California Geological Survey Special Report 223. [http://pubs.usgs.gov/ofr/2007/1437/].

Priedt, G., 1995. Explanation of mapping methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon.

Priedt, G., Goldfinger, C., Wang, K., Miller, R.C., Zhang, Y., and Boatella, A.M., 2009. Tsunami hazard assessment of the northern Oregon coast: a multi-scenarios approach. United States Geological Survey, Open-File Report 2009-1437.

Witter, R.C., Zhang, Y., Wang, K., Priedt, G.R., Goldfinger, C., Simey, L.L., English, T., and Priedt, G., 2011. Simulating tsunamis inundating the northern Oregon coast using topographic data and Alaska wet-thrust scenarios. Oregon Department of Geology and Mineral Industries Special Paper 43, 57 p.

Software

ESRI ArcGIS 10.1, Microsoft Excel, and Adobe Illustrator.

Funding: This map was funded under award #H000004670104 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.

Map Data Creation/Development: Zane A. Anderson, Steven George E. Priedt, Laura L. Simey, Daniel L. Cook, Ian P. Madin, Rachel L. Smith, and George P. Priedt. Cartography: Zane A. Anderson, Steven George E. Priedt, Laura L. Simey, Daniel L. Cook, Ian P. Madin, Rachel L. Smith, and George P. Priedt. Map Production: Zane A. Anderson, Steven George E. Priedt, Laura L. Simey, Daniel L. Cook, Ian P. Madin, Rachel L. Smith, and George P. Priedt. Distribution: Zane A. Anderson, Steven George E. Priedt, Laura L. Simey, Daniel L. Cook, Ian P. Madin, Rachel L. Smith, and George P. Priedt.

